

COMBi-CLL

LOG LOADER

LOAD LOGS INTO A CONTAINER IN 6 MINUTES.

The Logs are pre-loaded into the robust, 40' long high-sided Tub. The patented push-pull mechanism powers the loaded Tub into the container. Once inside, the Hatch is closed to hold the logs securely in place, and the Tub is retracted.



THE COST EFFECTIVE SOLUTION FOR LOADING LOGS INTO CONTAINERS

- 65,000 lbs. Capacity
- 6 Minute Load Time
- Increase Safety
- Reduced equipment

- Eliminate container damage
- Reduced truck waiting times



REAR RACK

Ensure the logs do not extend beyond the tub



STURDY HATCH DOOR

Pilot -Operated Check Valves on the Cylinders ensure the Hatch Door is positively locked





HEAVY DUTY TUB

With reinforced Base & Side Walls give structural rigidity and eliminate risk of container wall damage

COMBi-CLL

LOG LOADER

COMBiLIFT
LIFTING INNOVATION

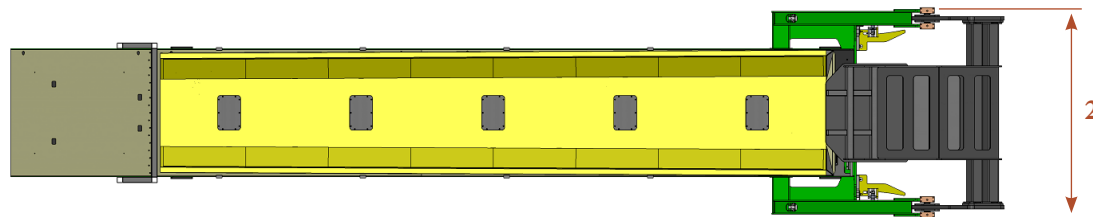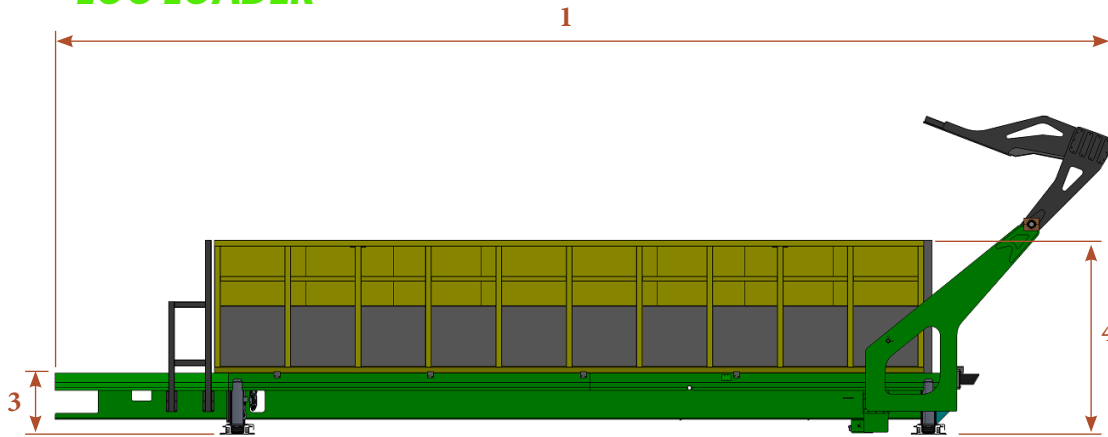

| DESCRIPTION | COMBI-CSS SLIP-SHEET (IMPERIAL) | |
|-------------|---------------------------------|------------------------------|
| 1 | OVERALL LENGTH | 680" |
| 2 | WIDTH | 143" |
| 3 | SHEET HEIGHT | 40 - 60" |
| 4 | OVERALL HEIGHT | 205 - 225" |
| A | CAPACITY | 65,000 LBS |
| B | MOTOR | 50 HP |
| C | POWER | 480 V, 3-PHASE, 100 AMP |
| D | HYDRAULIC STROKE MECHANISM | 479" |
| E | CONTAINER SIZES | 20'/30'/40' |
| F | SLIP SHEET MATERIAL | HARDOX |
| G | CYCLE TIMES | 40' IN 6 MINS, 20' IN 3 MINS |



Logs are preloaded into the Tub & Container attached



Loaded Tub is powered into the Container



Loaded Tub securely inside Container.



Hatch Closes Down



Hatch Locks down & Tub powers out



Hatch Opens Up & loaded Container is detached.



Search #Combilift

Combilift USA, 303 Concord Street, Greensboro, NC 27406

+1 877 266 2456

combilift.com