




The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.

0a








4

combilift.com

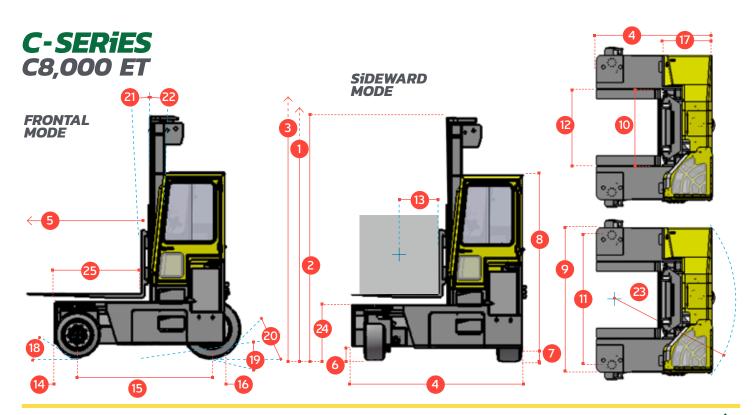

R	EF.	DESCRIPTION	C8000 ET	Multi-Directional
	1a	Standard Lift Height	4536 mm	(🗙
	1b	Freelift Height	0 mm	
	2	Height Mast Closed	3430 mm	
	3	Max. (Mast raised)	5936 mm	
	4	Overall Length	2670 mm	
	5	Mast Travel	1530 mm	
	6	Ground Clearance Under Mast	290 mm	
	7	Ground Clearance to Centre of Wheelbase	200 mm	
	8	Height Over Cab (Without work - lights)	2650 mm	
	9	Width	3045 mm	
1	10	Outside Spread of Fork Arms	1600 mm	
	11	Track Front	2732 mm	
	12	Frame Opening	1650 mm	
	13	Load Centre Distance	600 mm	
1	14	Overhang Front	323 mm	
•	15	Wheelbase	2161 mm	
	16	Overhang Back	186 mm	Features Include:
	17	Length From Face of Fork	1180 mm	
	18	Approach Angle	45 °	Rubber Mounted Cabin
1	19	Ramp Angle	29 °	 Multi-Direction Operation
	20	Departure Angle	45°	Load Sensing Steering
	21	Forward Tilt	3°	
	22	Backward Tilt	5°	3 Wheel Drive
_	23	Minimum Outside Radius	2765 mm	• 4-way lever positioning of Wheels
	24	Platform Height	790 mm	AC Motor Technology
Z	25	Platform Length	1490 mm	Activition reclinitionally
	Α	Capacity	8000 kg	
	В	Unladen Weight	11500 kg	
	С	Maximum Ground Speed	12 km/h	
	D	Gradibility	10%	Distributed by:
	E	Drive Rear/Front	7 kw x 1 / 6 kW x 2	
	F	Electrics	80V x 1000 Ah	
	G	Fork Section	50 mm x 200 mm x 1490 mm	
	Н	Front Tyre	OD 645 mm / Width 300 mm	

Australian Patent No. 2014217777; Brazilian Patent Application No. BR 11 2015 020348 5; Canadian Application No. 2,901,522; Chinese Patent No. ZL 201480009365.9; European Patent No. 2956350; German Patent No. 60 2010 037 116.6; Indian Patent Application No. 2438/MUMNP/2015; United States Patent No. 9,561,943; UK Patent Application No. 1803601.2; PCT Application No. PCT/EP2019/051235

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

OD 840 mm / Width 350 mm

Yellow & Grey

Grammar MSG65/521

CO. MONAGHAN +

Rear Tyre

Standard Colour

Suspension Seat

I

<mark>К</mark>

+353 47 80500 INFO@COMBILIFT.COM

combilift.com